


# Specifications of GOQ 2 LED Frosted



## **Specifications**

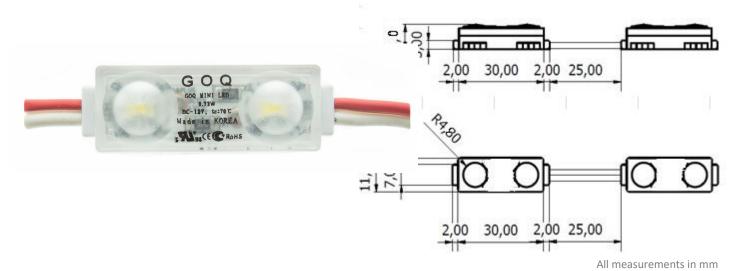

| GOQ 2 LED Frosted     |               |          |
|-----------------------|---------------|----------|
| Item                  | Specification | Unit     |
| LED                   | 2835 Type     | -        |
| Input Voltage         | DC12          | V        |
| Input Current         | 60            | mA       |
| Power (Single module) | 0.72          | W        |
| Viewing Angle         | 160           | •        |
| Luminous Intensity    | 70            | lm(Typ.) |
| CRI                   | 80            | %        |
| Module Pitch          | 25            | Mm       |
| Size                  | 34 x 11.6 x 9 | Mm       |
| Weight                | 3.8           | g        |
| Max. in Series        | 50            | -        |
| Operating Temp        | -30 to 85     | °C       |
| Storage Temp          | -40 to 100    | °C       |
| Waterproof            | IP68          | -        |



#### <u>Application</u>

- Narrow and Close-fitting Channel letters
- ~ Flex light Box illumination
- ~ Duplex light Box illumination

#### <u>Features</u>

- Power consumption : 0.72W
- ~ LED provided by SAMSUNG ( LED : 2835 TYPE)
- ~ SMD LED mounted : Made in Korea
- LED Driver : Constant Voltage Driving System
- ~ Max. 50 modules in series
- Design of a new and unique CAP TYPE Optical Lens
- ~ Best Viewing Angle : 160⁰
- Design for humid conditions & waterproof: IP68
- ~ Easy Installation & maintenance

### Viewing Spectrum & Radiation Characteristics

